

FIG. 1

2/28

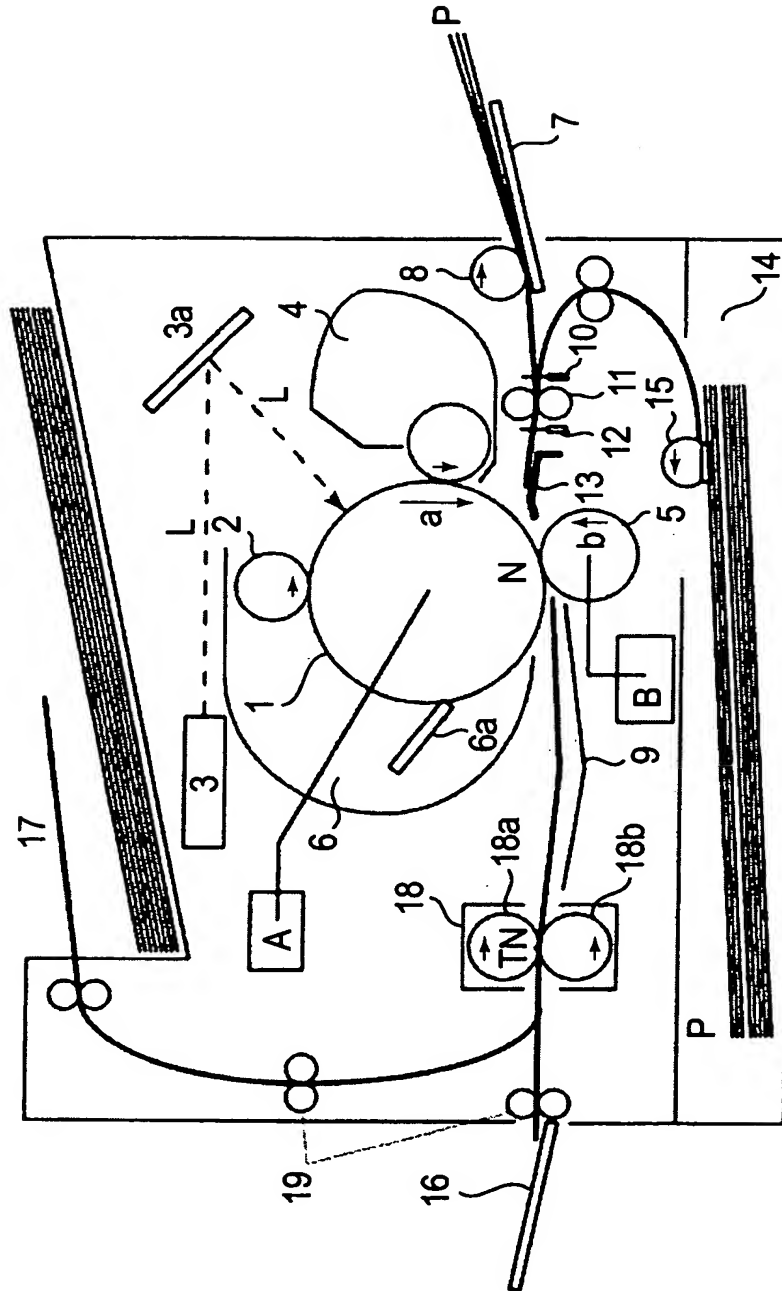
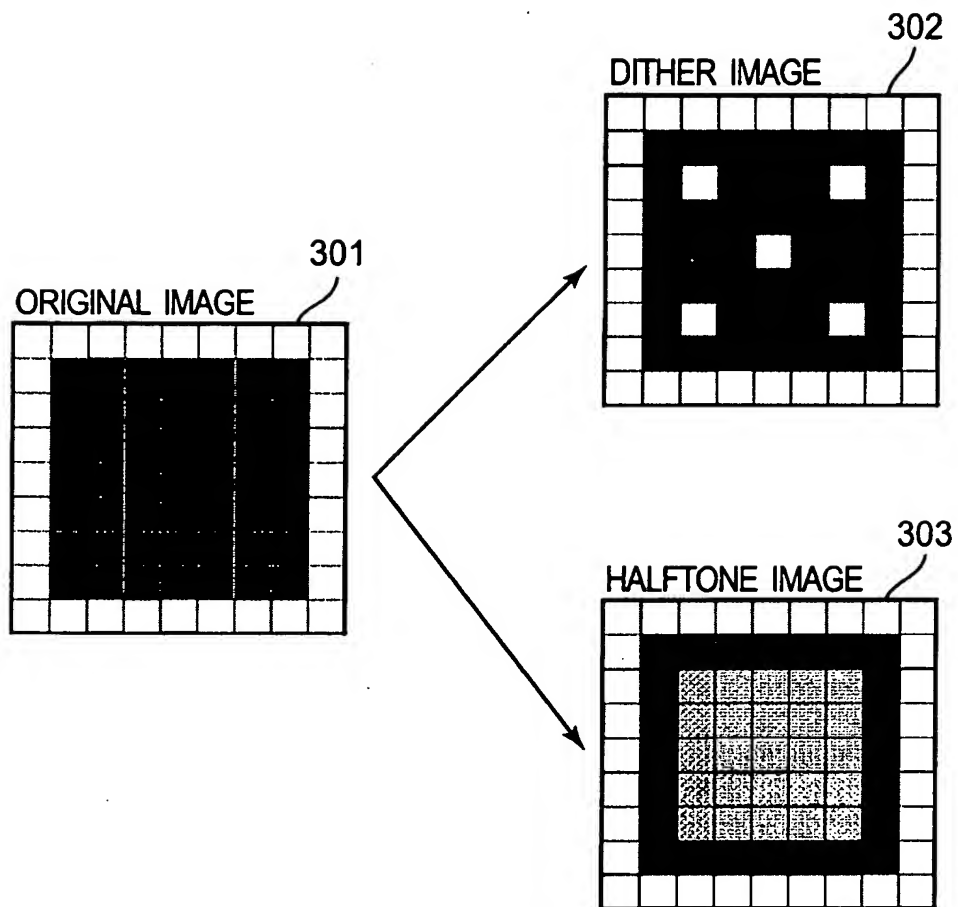


FIG.2

3/28

**FIG.3**

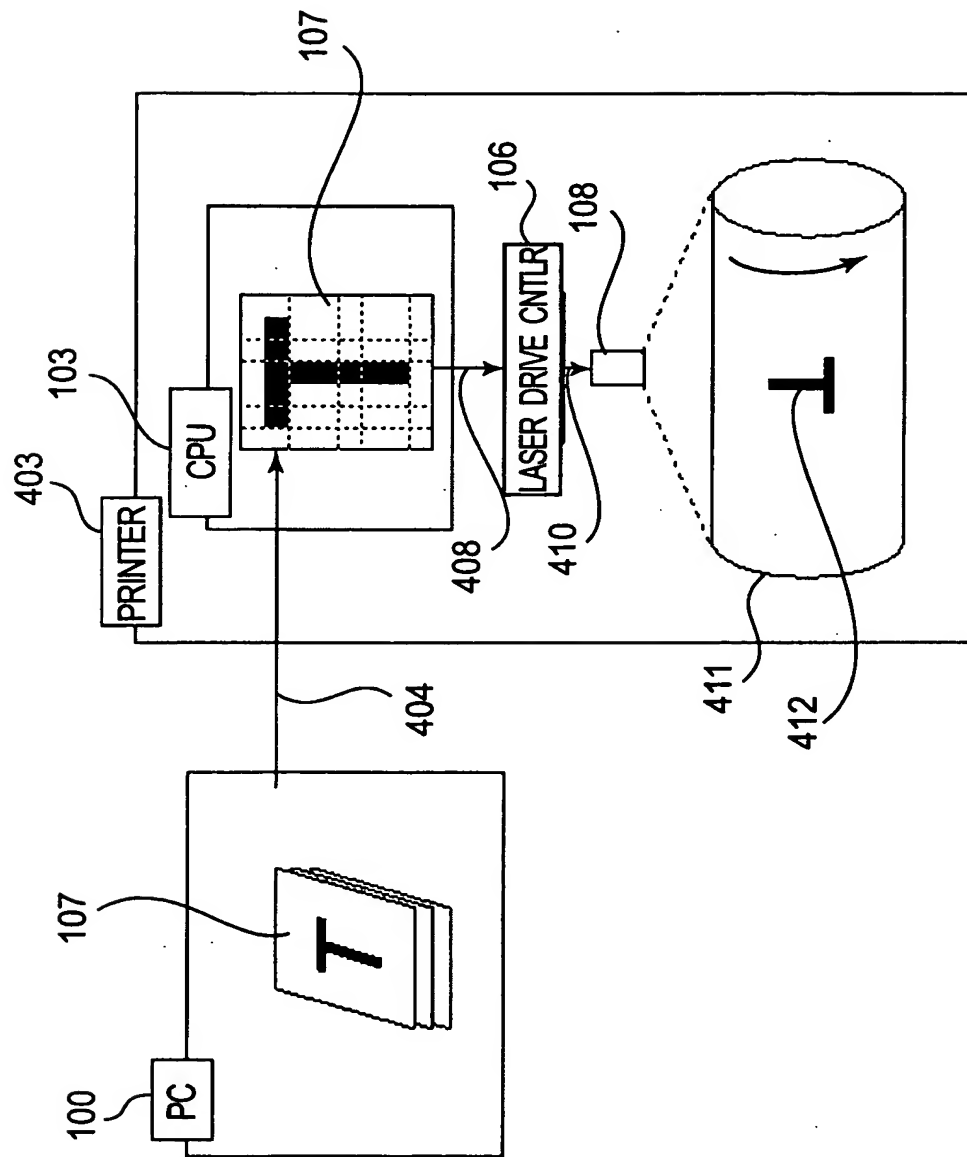
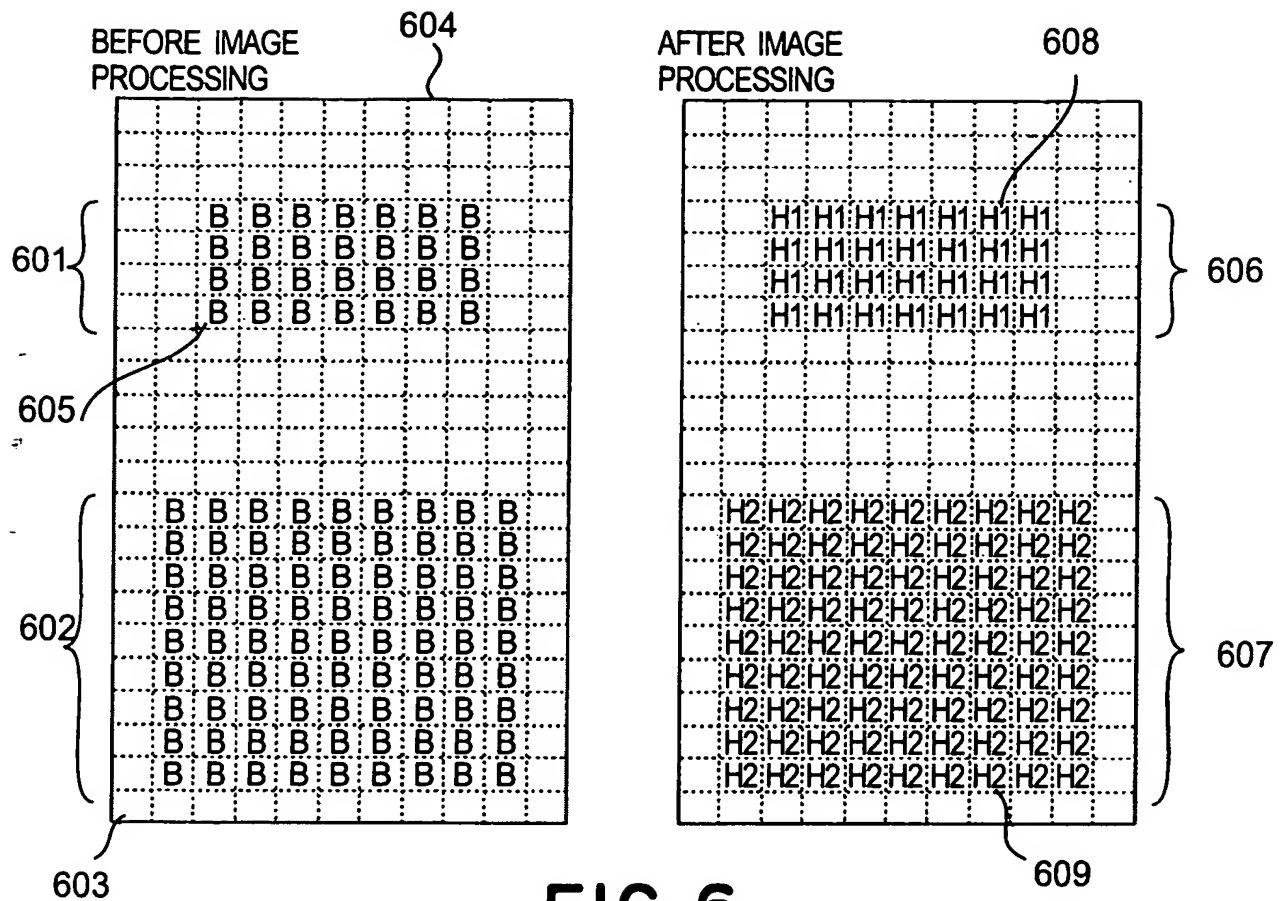
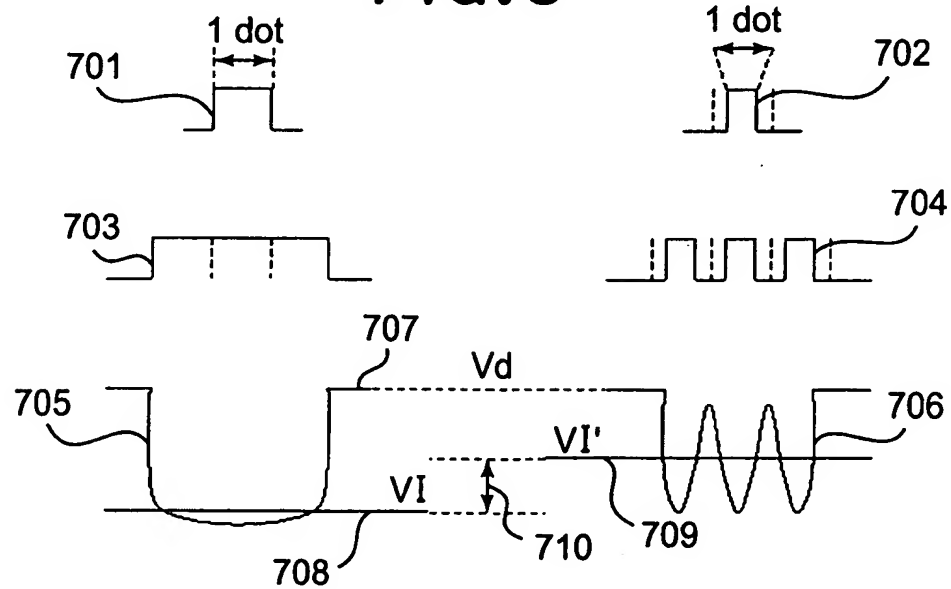
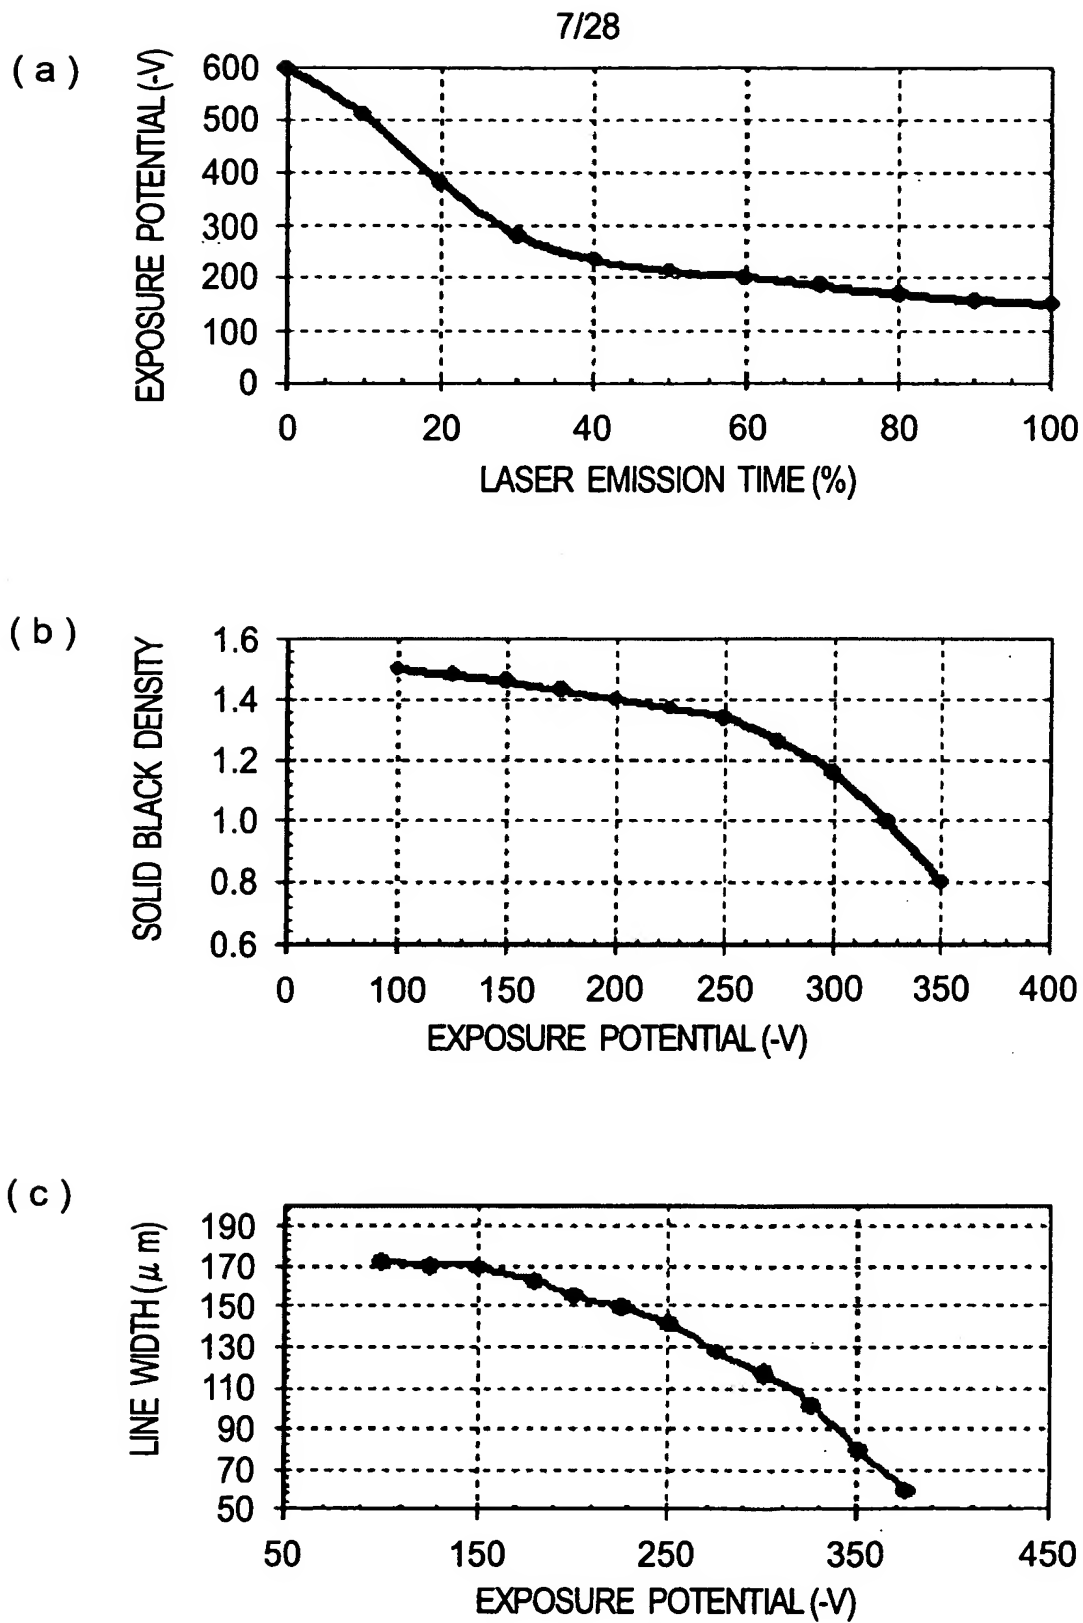



FIG. 4

6/28



**FIG. 6****FIG. 7**

**FIG.8**



8/28

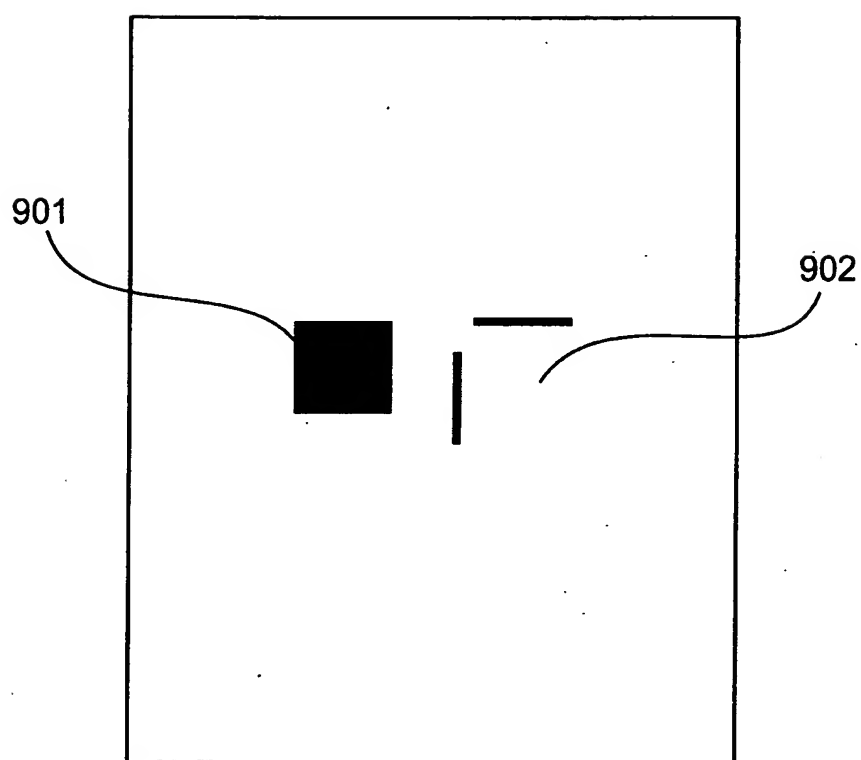**FIG. 9**

9/28

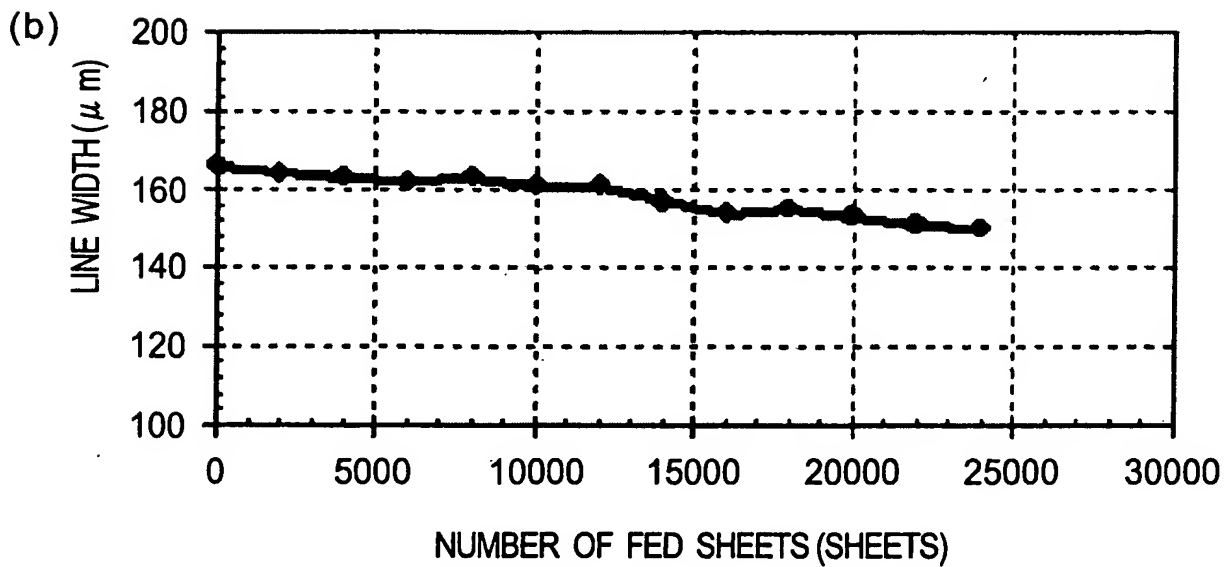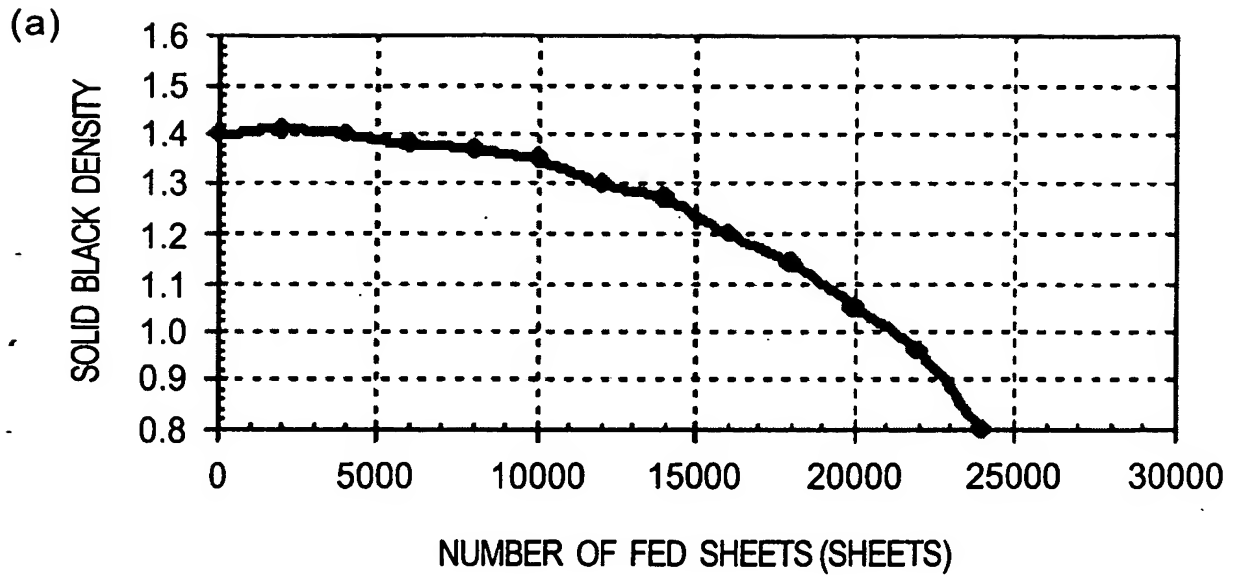**FIG. 10**

10/28

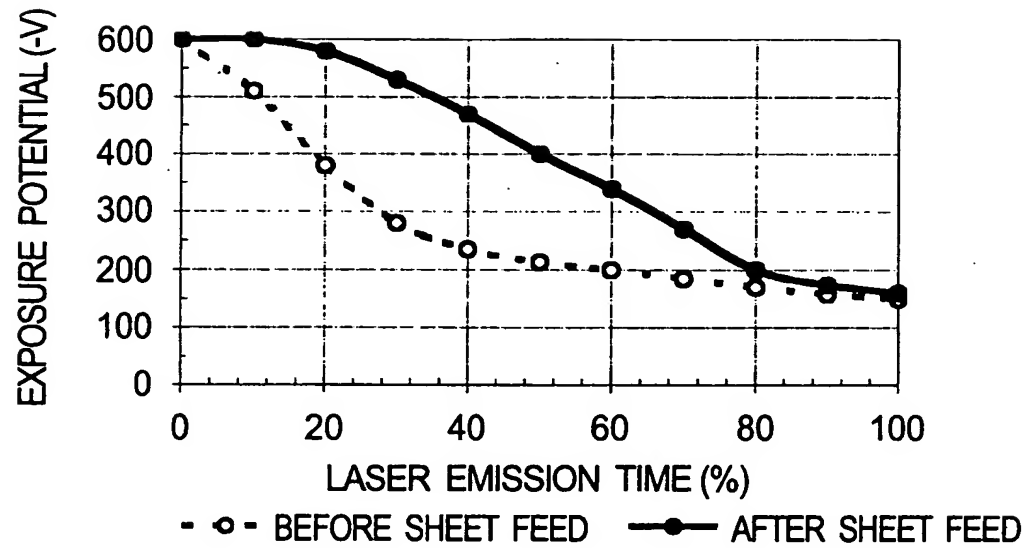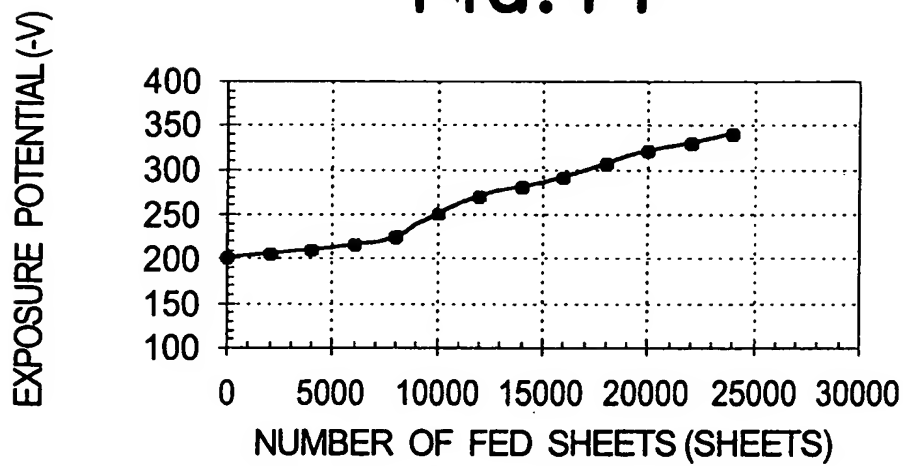**FIG. 11****FIG. 12**

11/28

DRUM USAGE	REFERENCE EMISSION TIME
0	63nsec
37750	68nsec
75500	73nsec
113250	78nsec
151000	84nsec
181200	-

FIG. 13

LOW CONSUMPTION MODE	DRUM USAGE	REFERENCE EMISSION TIME
MODE 1	0	63nsec
MODE 2	37750	68nsec
MODE 3	75500	73nsec
MODE 4	113250	78nsec
MODE 5	151000	84nsec
MODE 6	181200	-

FIG. 14

12/28



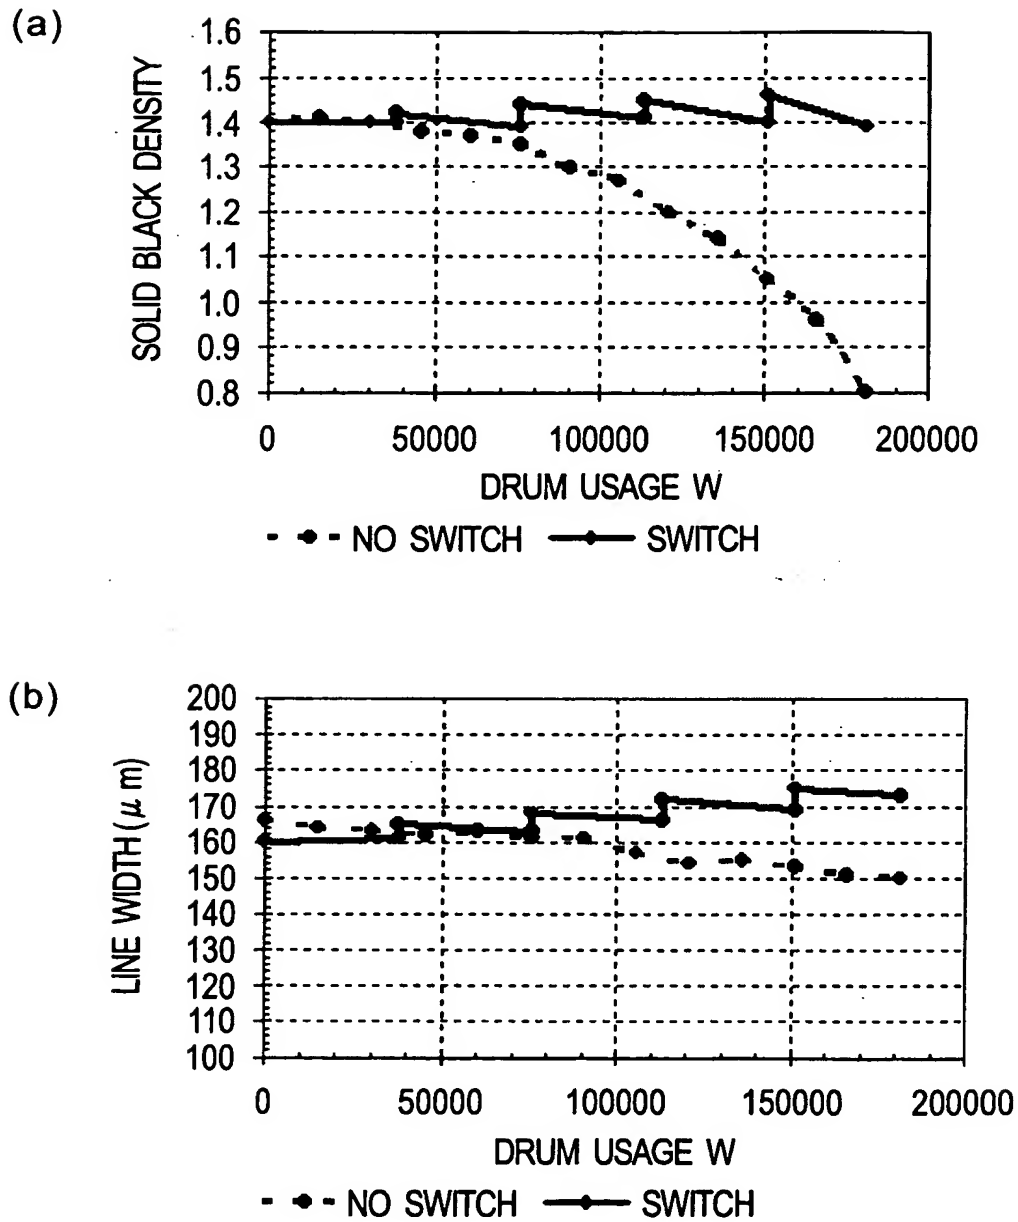


FIG. 15

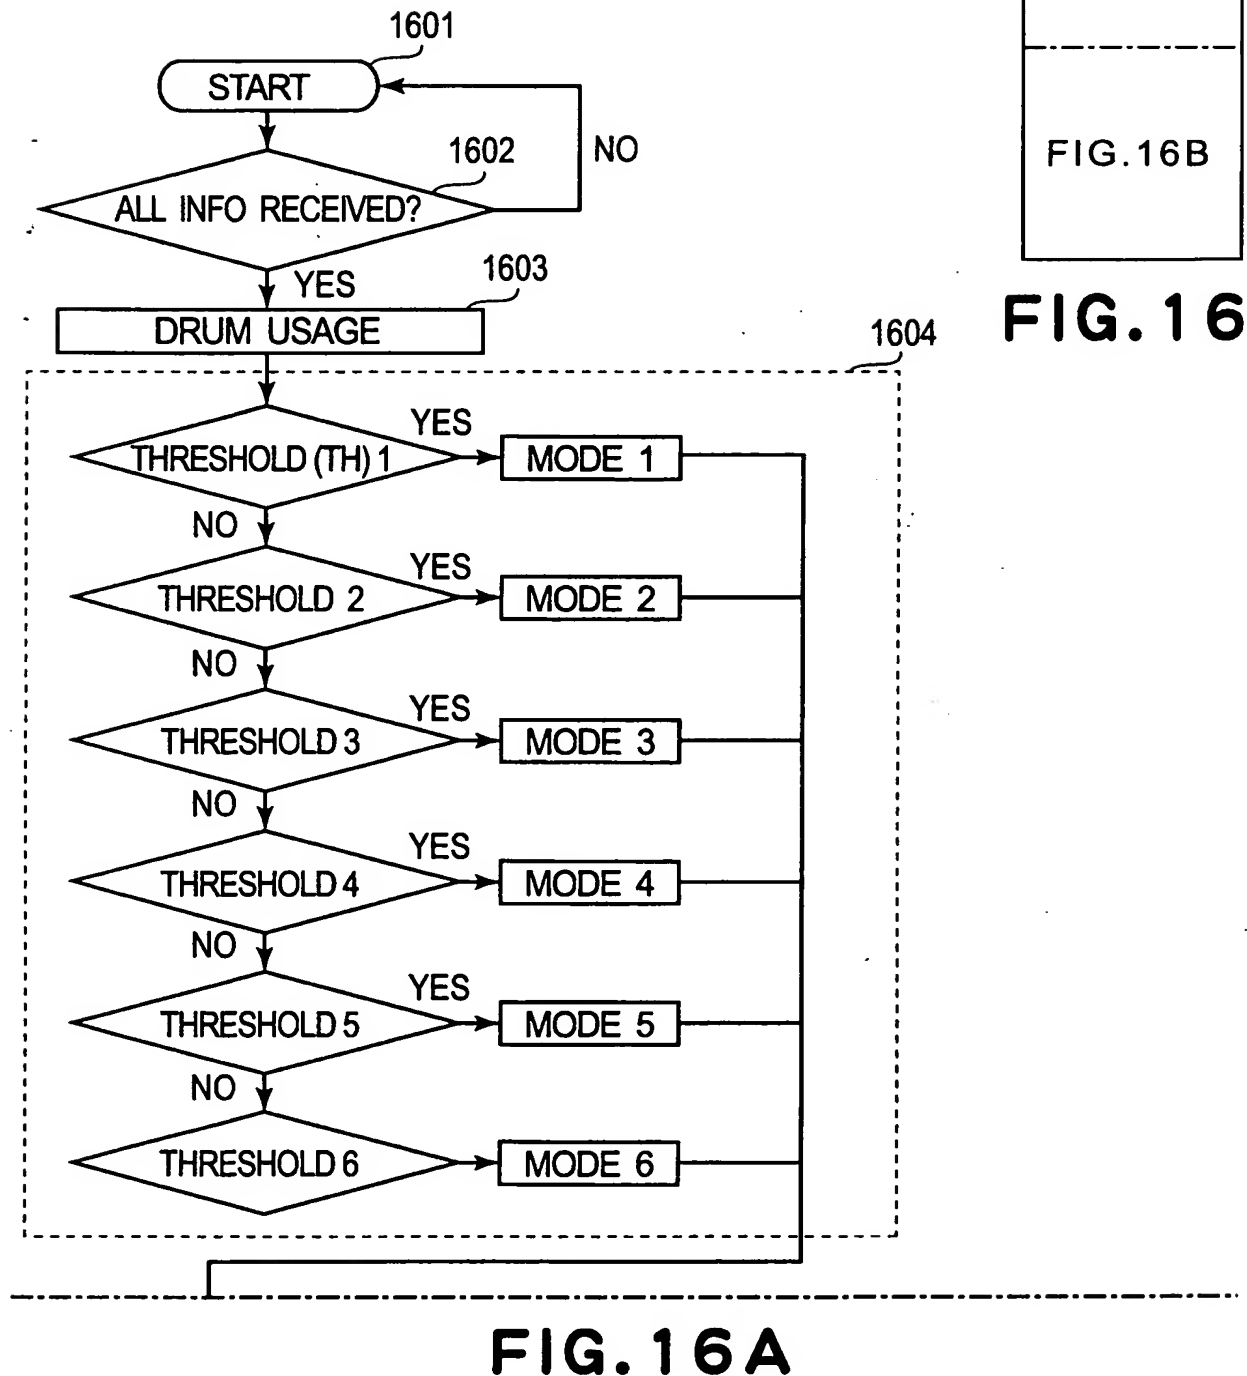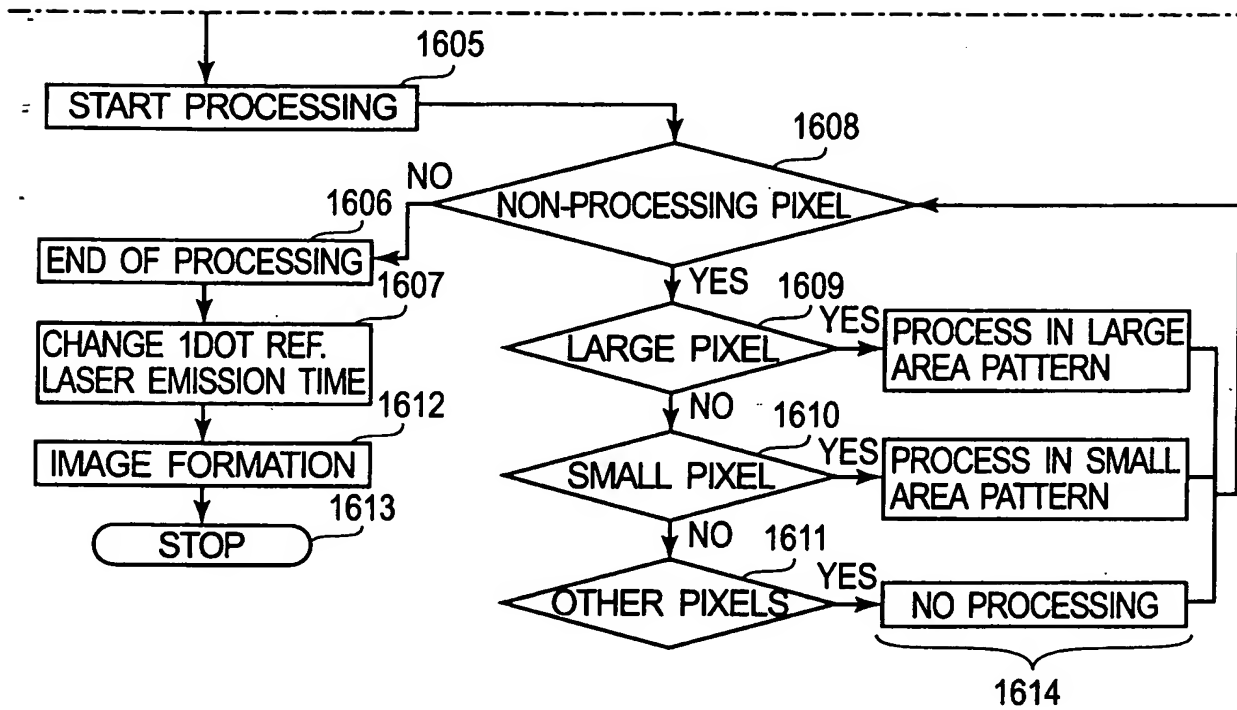

14/28

**FIG. 16B**

15/28

DRUM USAGE	LASER EMISSION TIME	PROPORTION TO REF. EMISSION TIME
0	28nsec	80%
37750	28nsec	80%
75500	32nsec	83%
113250	36nsec	85%
151000	40nsec	88%
181200	44nsec	90%

FIG. 17

MODE	DRUM USAGE	LINE IMAGE	SOLID BLACK IMAGE
MODE 1	0	80%	60%
MODE 2	105700	83%	65%
MODE 3	120800	85%	70%
MODE 4	135900	88%	75%
MODE 5	151000	90%	80%
MODE 6	166100	-	-

FIG. 18

16/28

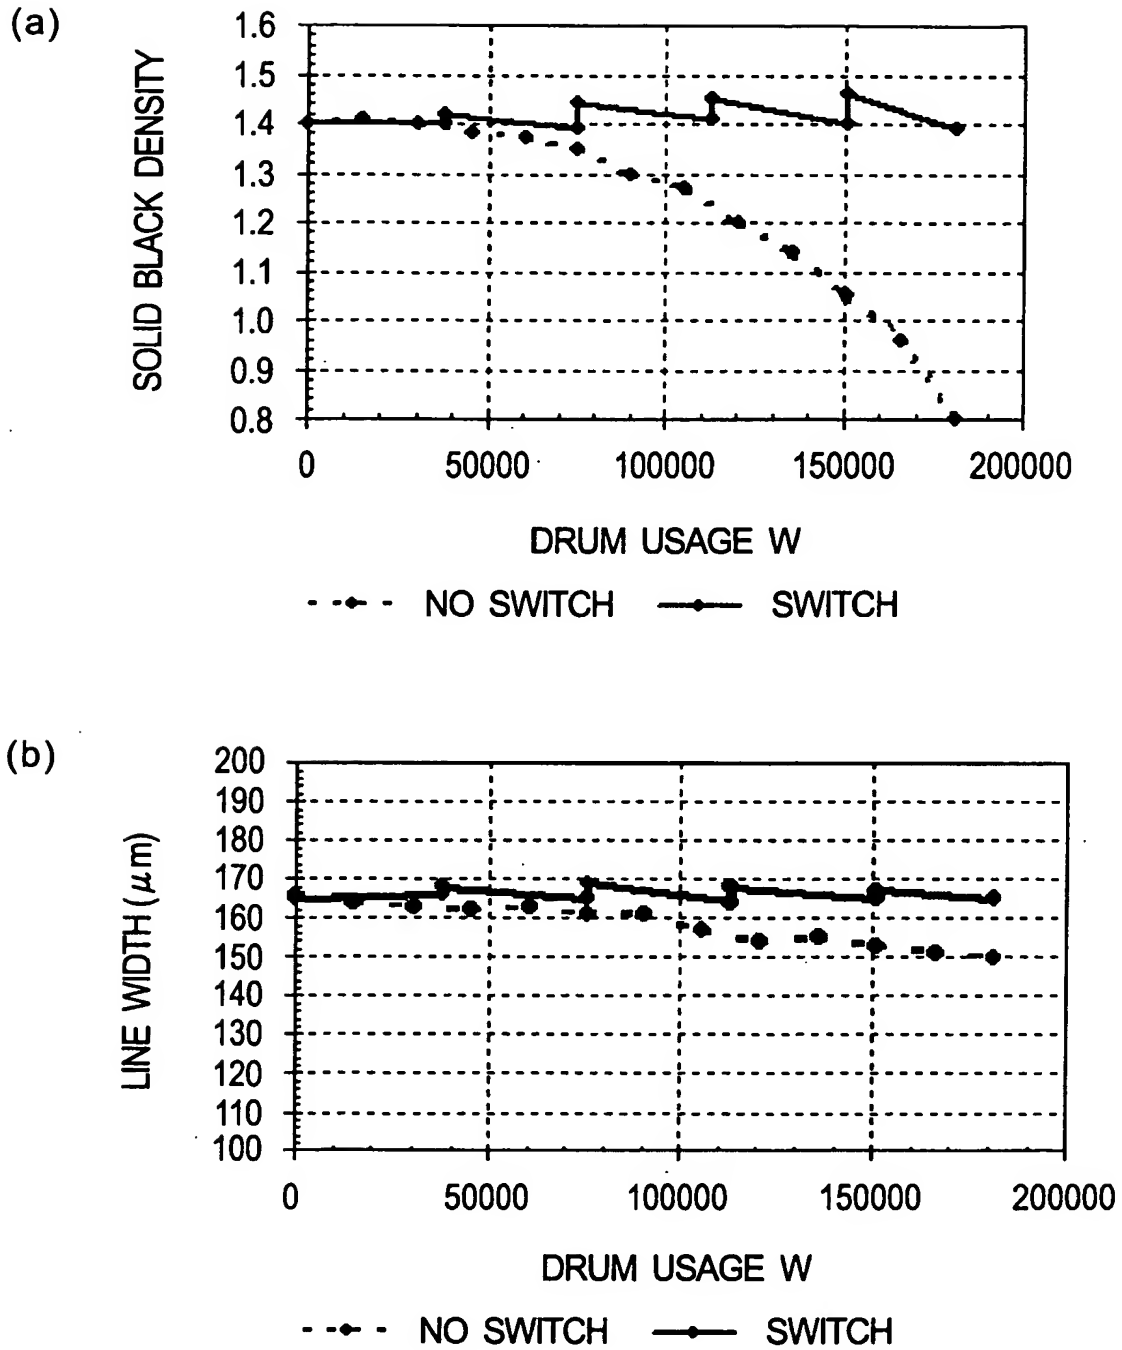
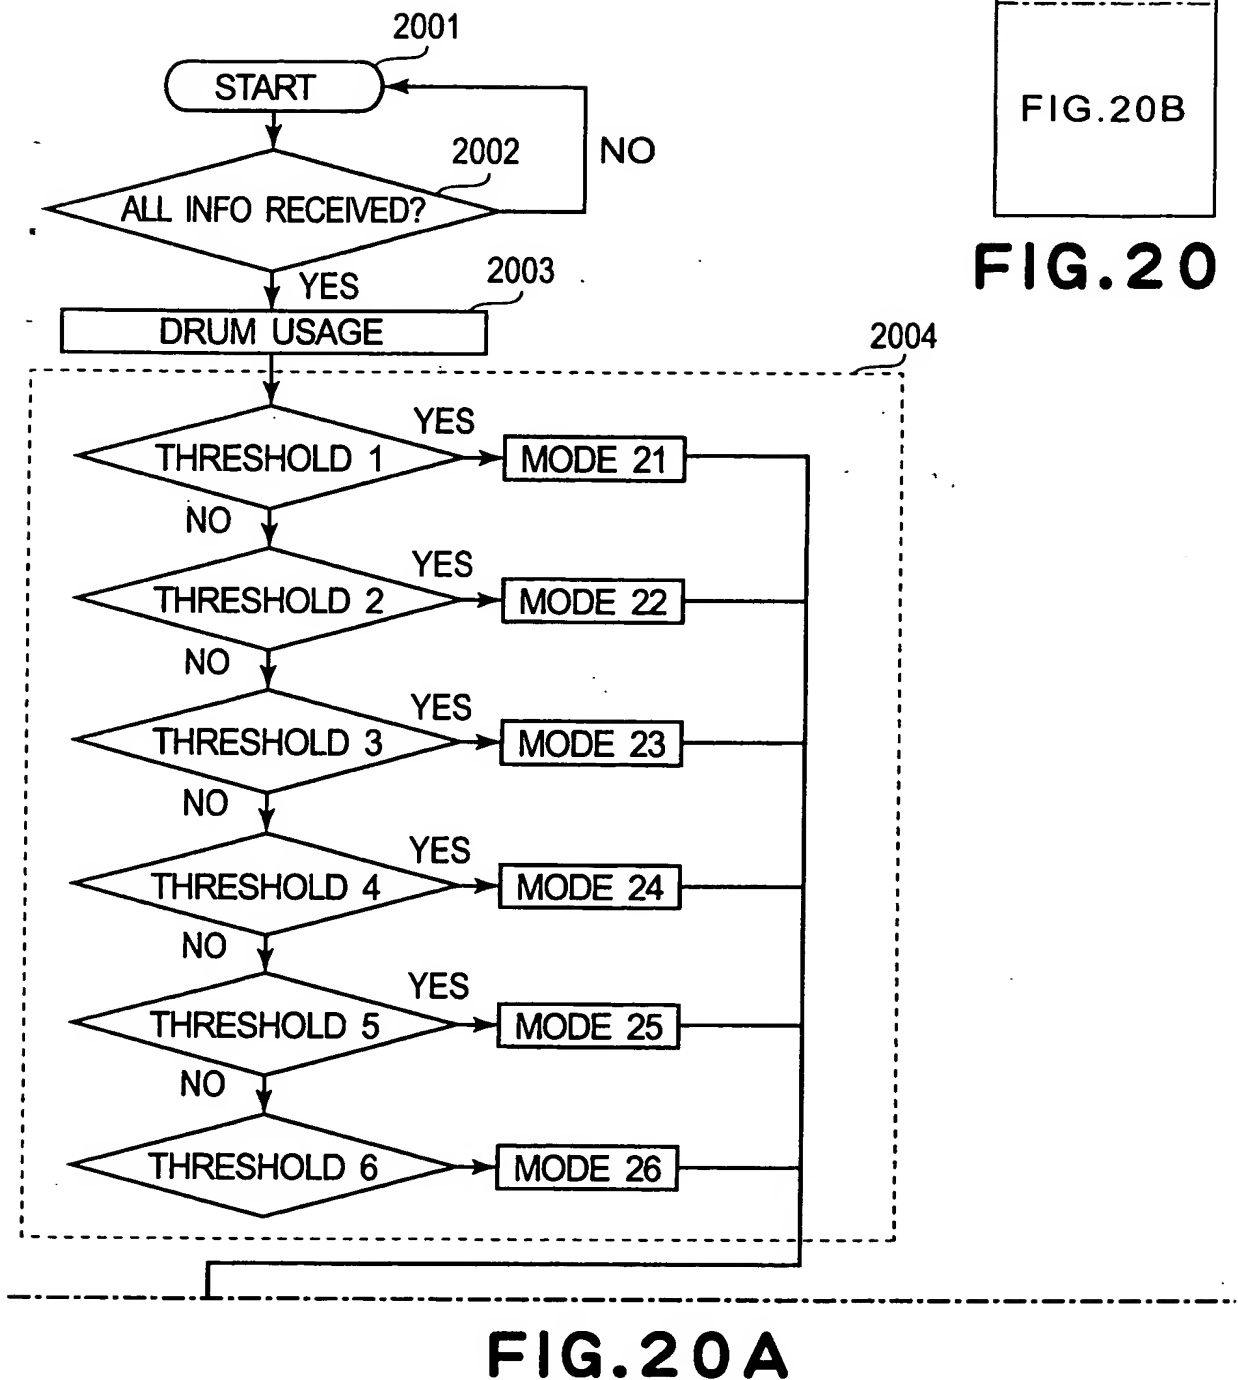


FIG. 19



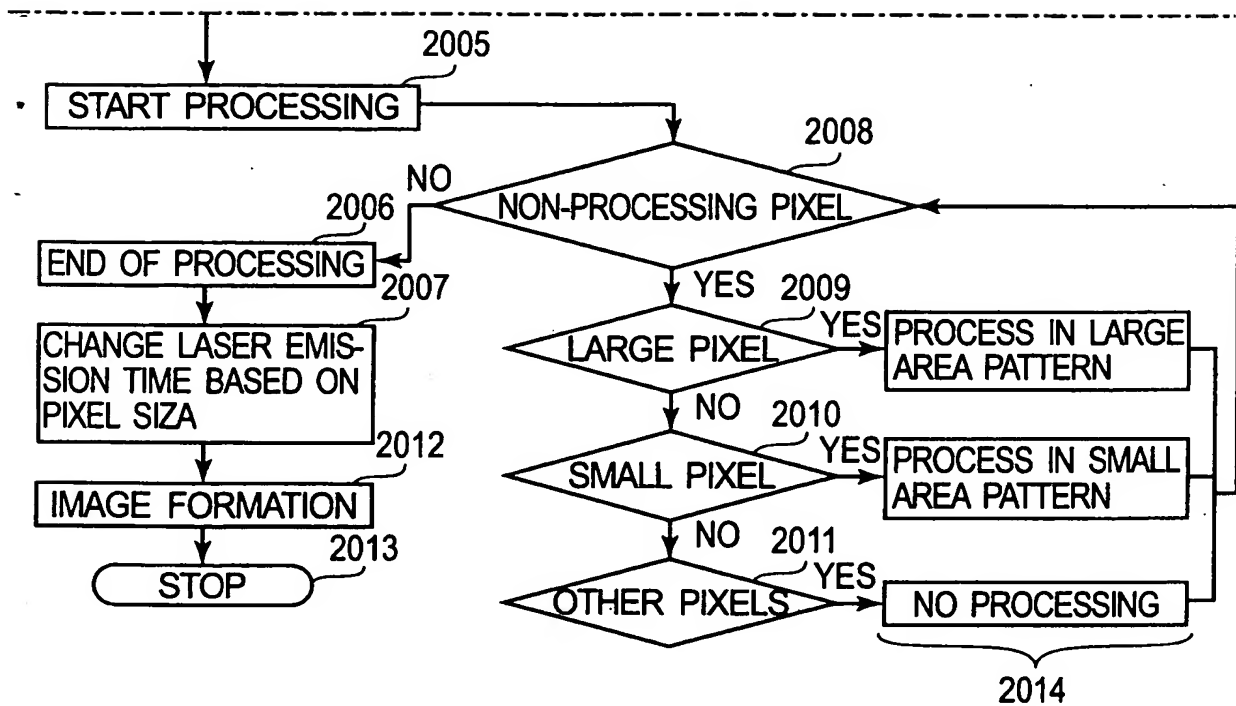
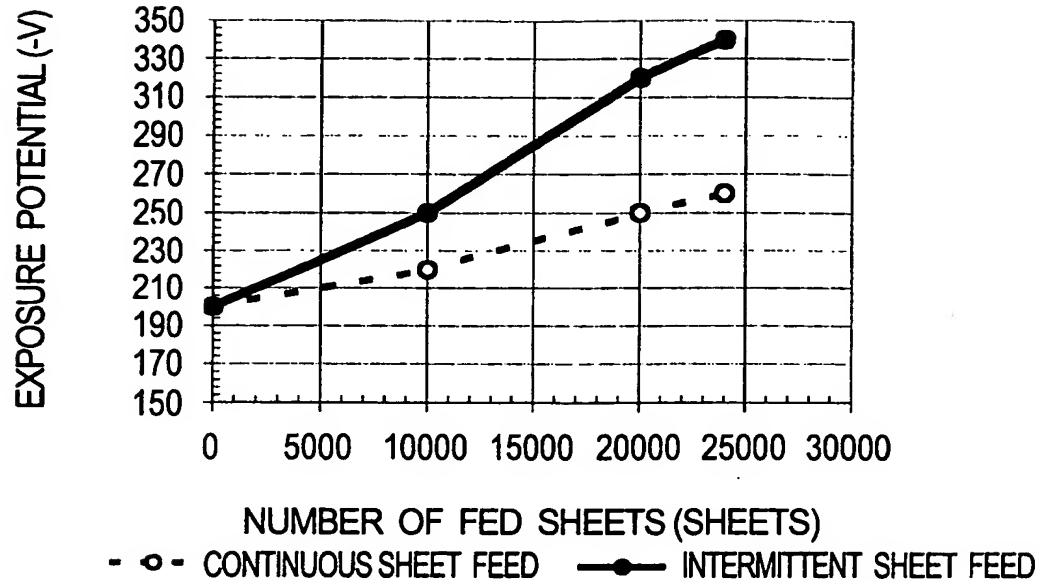



FIG. 20B

19/28

**FIG.21**

	APPLICATION TIME				CONTINUOUS TIME	INTERMITTENT TIME
	PRE-ROTATION	SHEET FEED	POST-ROTATION	SHEET INTERVAL		
Pt	2.0	1.7	2.0	1.0	2.7	5.7
Dt	2.5	1.7	2.5	1.0	2.7	6.7

(sec)

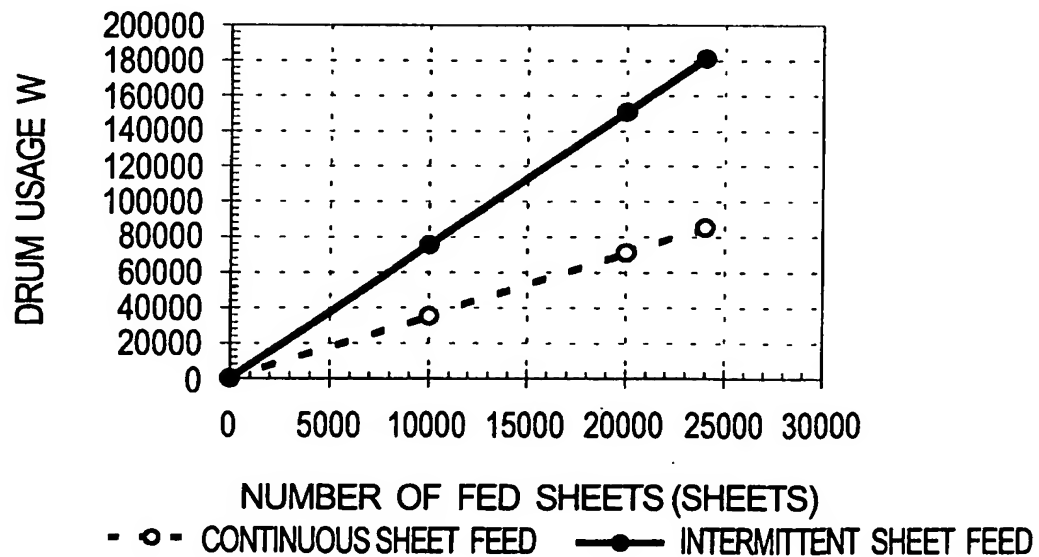FIG.22**FIG.23**

20/28

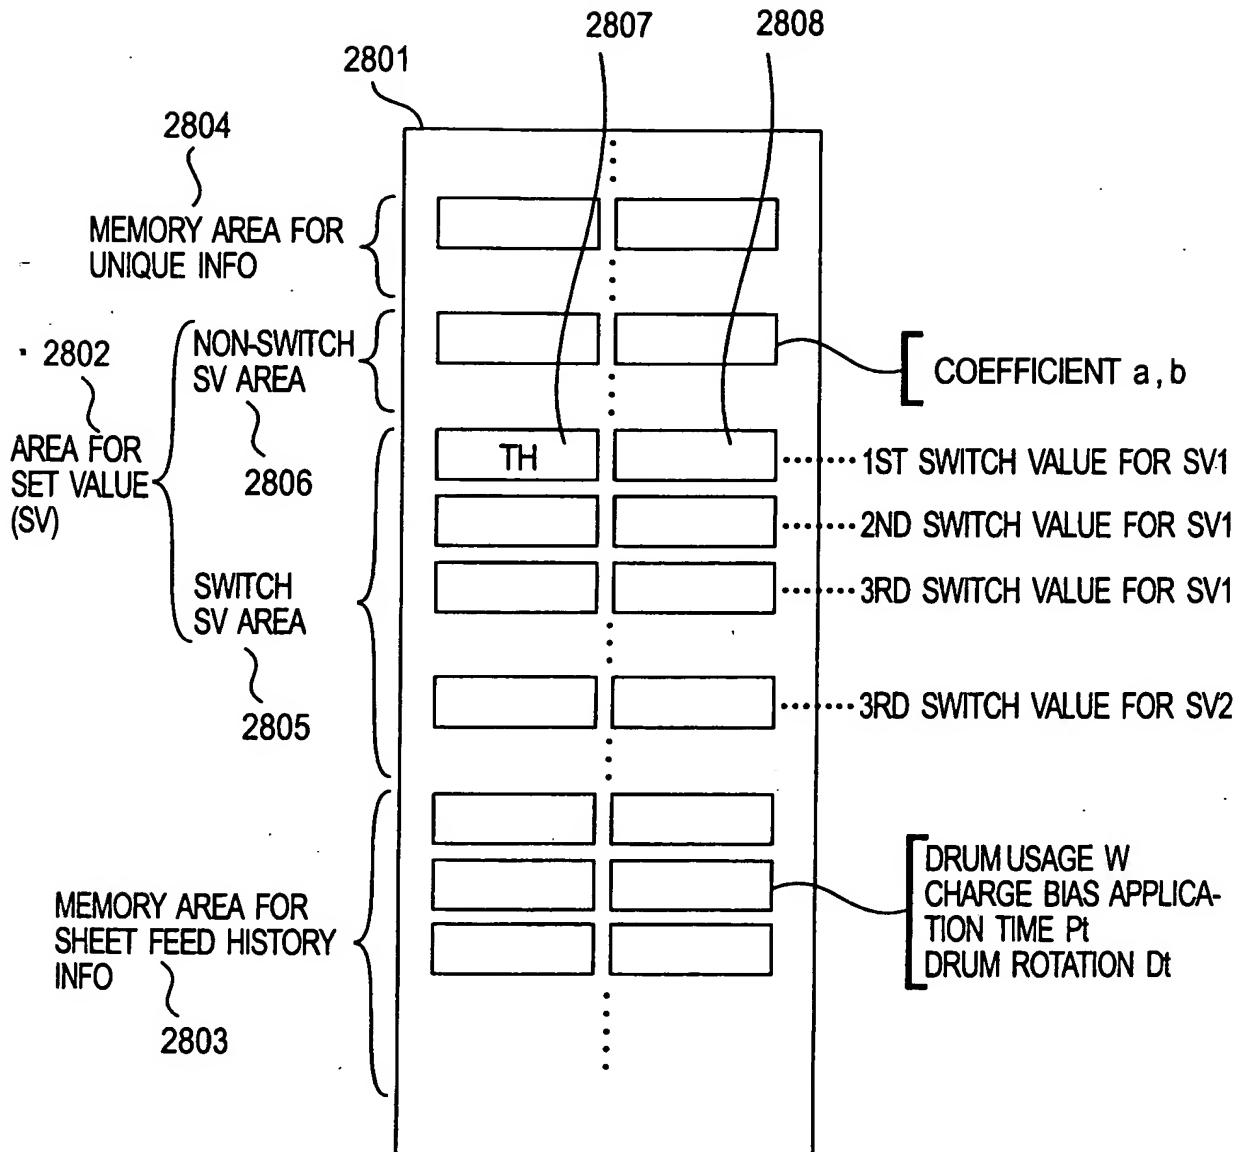


FIG.24

21/28

DRUM USAGE	LASER LIGHT QUALITY
0	2.4 mJ/m ²
37750	2.4 mJ/m ²
75500	2.6 mJ/m ²
113250	2.8 mJ/m ²
151000	3.0 mJ/m ²
181200	3.2 mJ/m ²

FIG.25

THRESHOLD	DRUM USAGE	LASER LIGHT QUALITY
TH 1	0	2.4 mJ/m ²
TH 2	37750	2.6 mJ/m ²
TH 3	75500	2.8 mJ/m ²
TH 4	113250	3.0 mJ/m ²
TH 5	151000	3.2 mJ/m ²
TH 6	181200	-

FIG.26

22/28

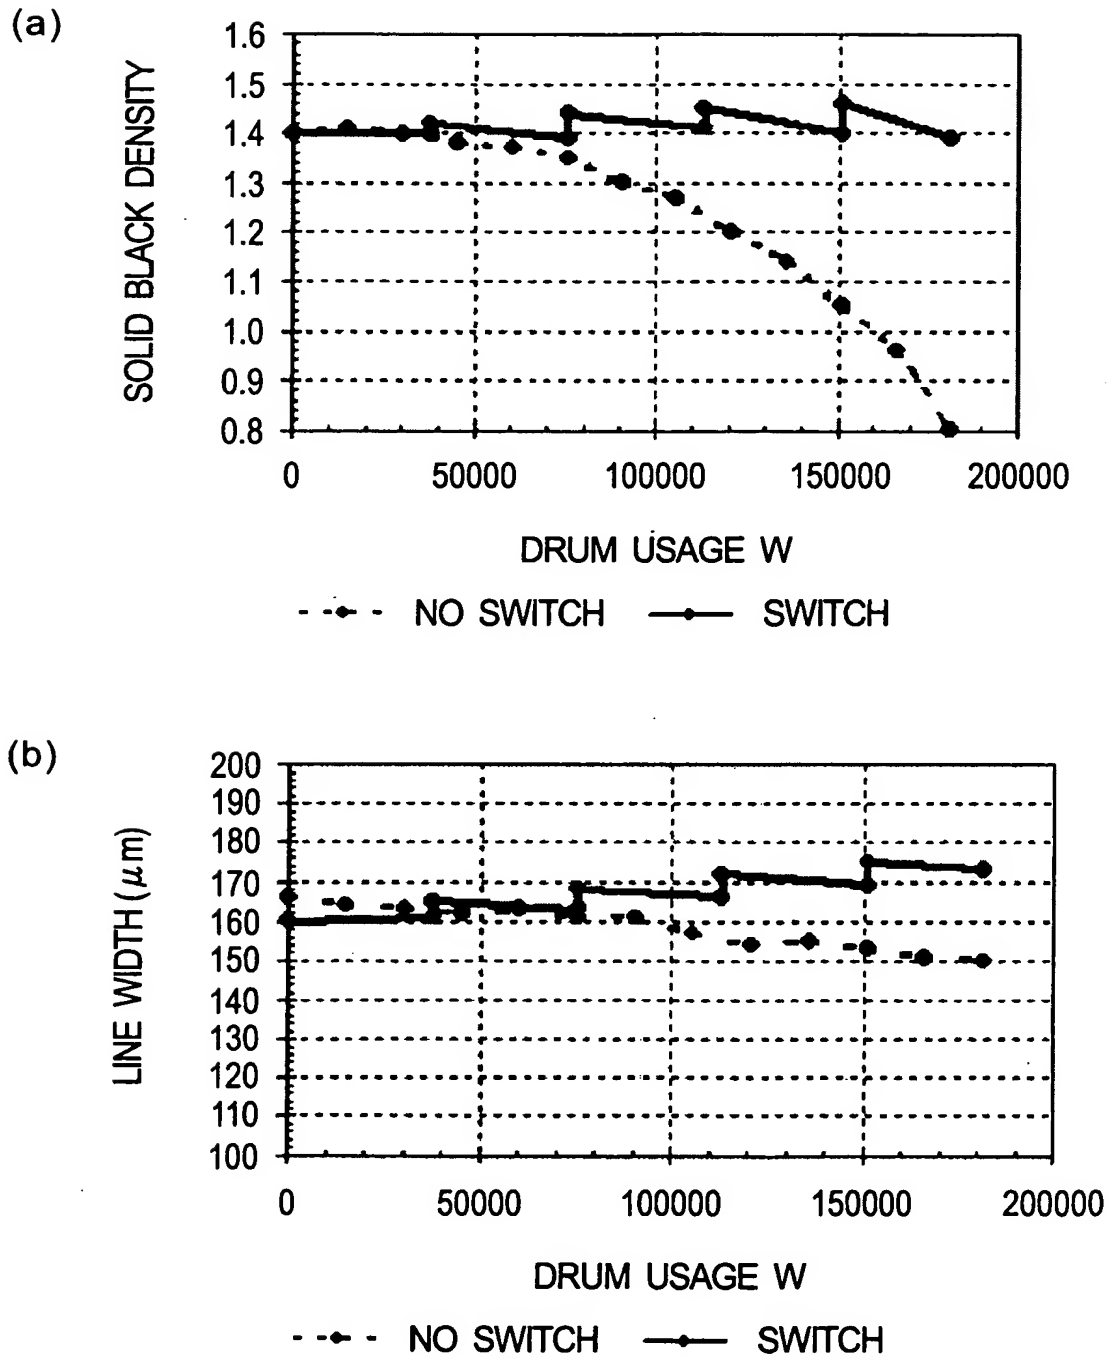


FIG.27

FIG.28A

FIG.28B

FIG.28

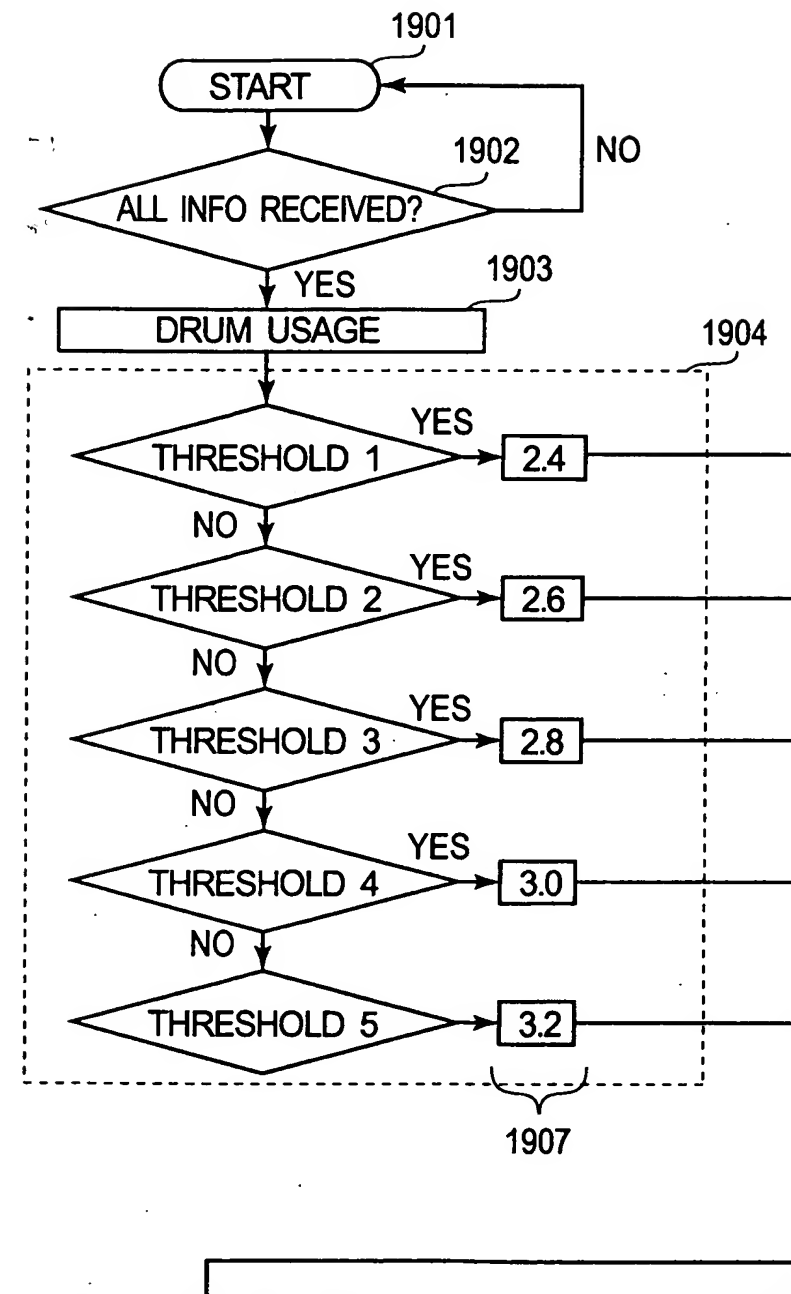
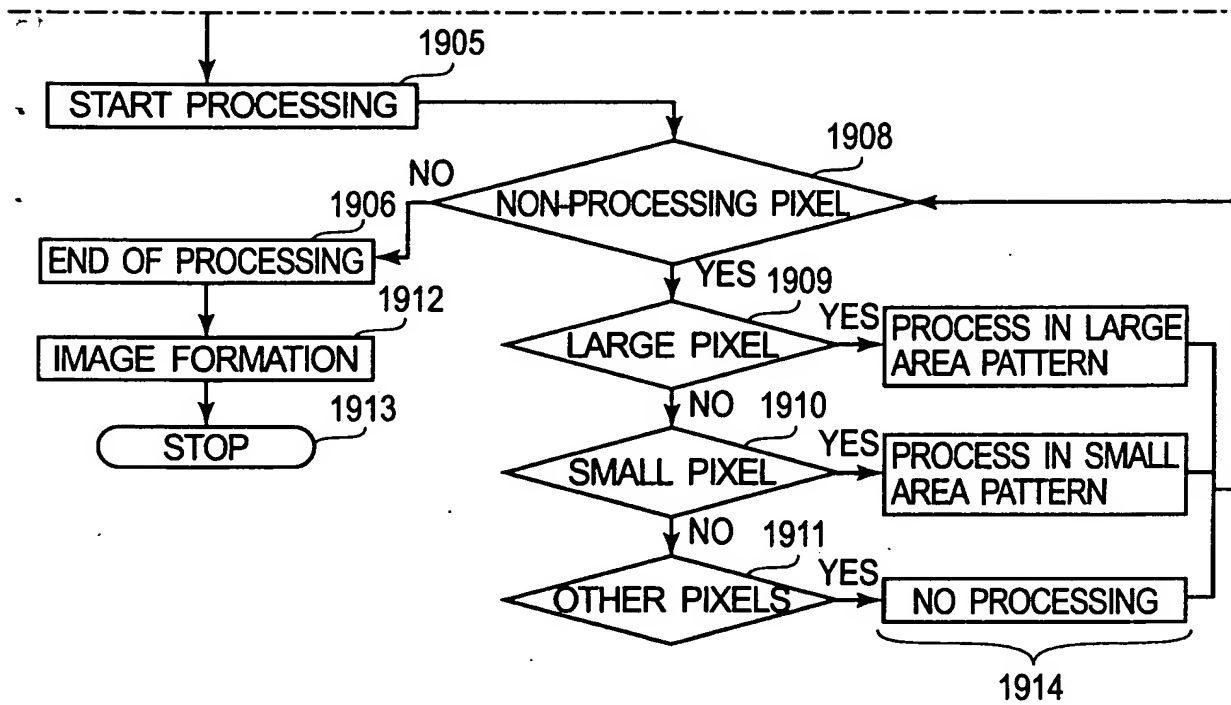
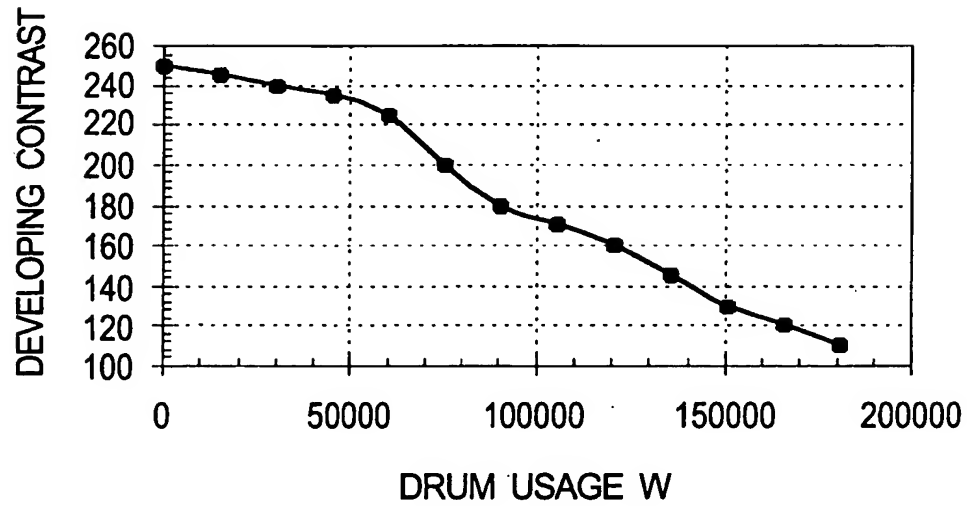


FIG.28A

24/28

**FIG. 28B**

25/28


**FIG.29**

THRESHOLD	DRUM USAGE	CHARGING BIAS DC COMPONENT	DEVELOPING BIAS DC COMPONENT
TH 1	0	-600V	-450V
TH 2	37750	-640V	-490V
TH 3	75500	-690V	-530V
TH 4	113250	-720V	-570V
TH 5	151000	-750V	-600V
TH 6	181200	-	-

FIG.30

26/28

(a)

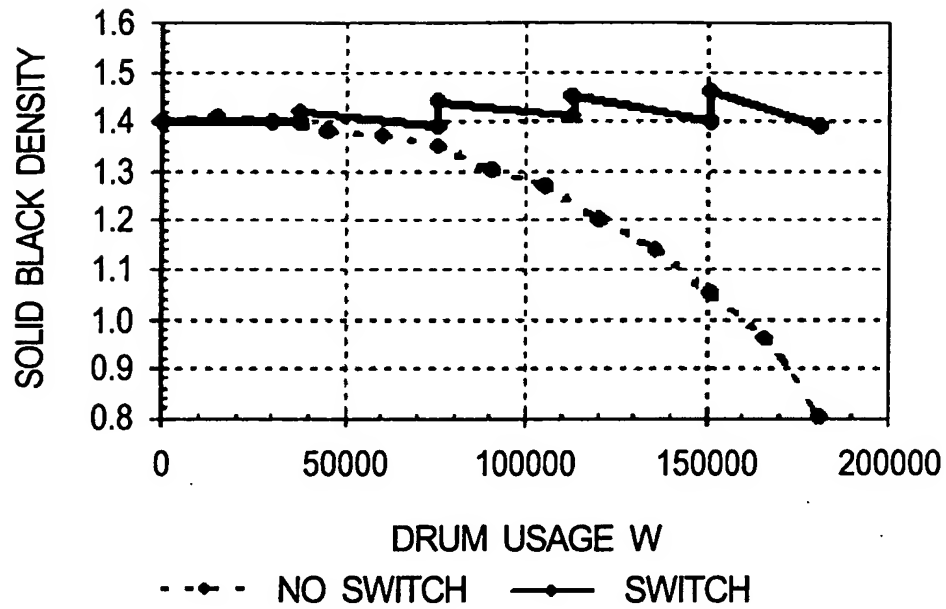

(b)

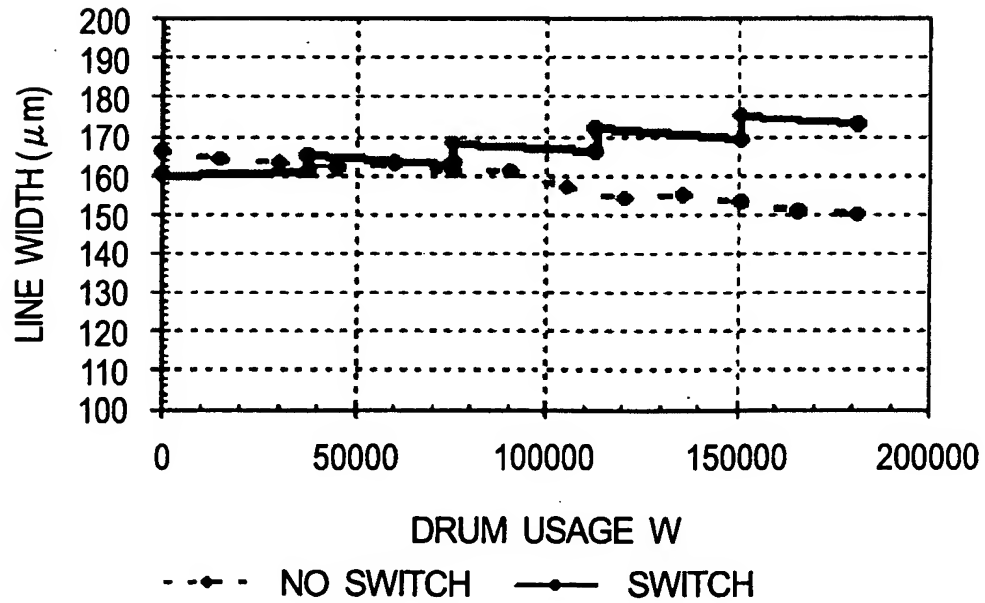


FIG.3 1

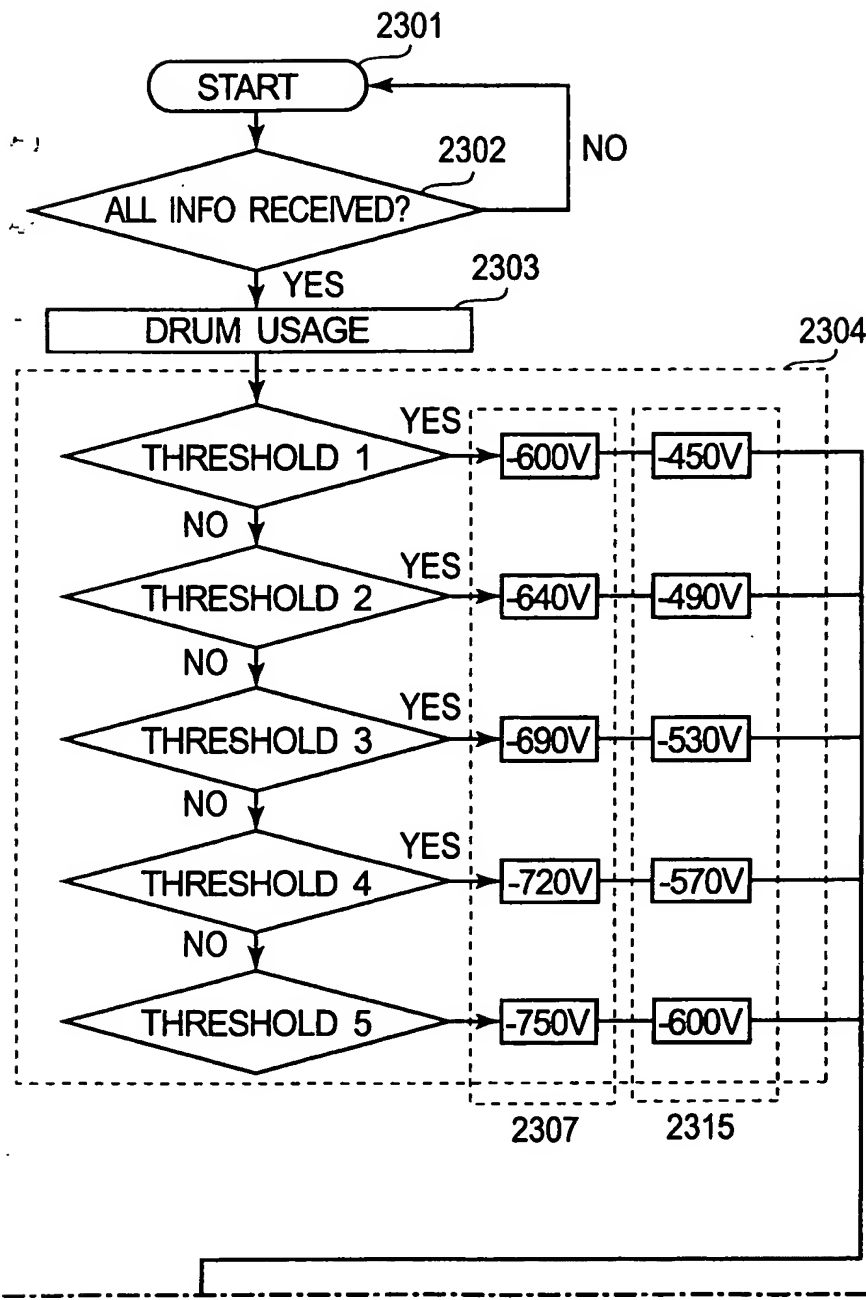


FIG. 32A

FIG. 32B

FIG. 32

FIG. 32A

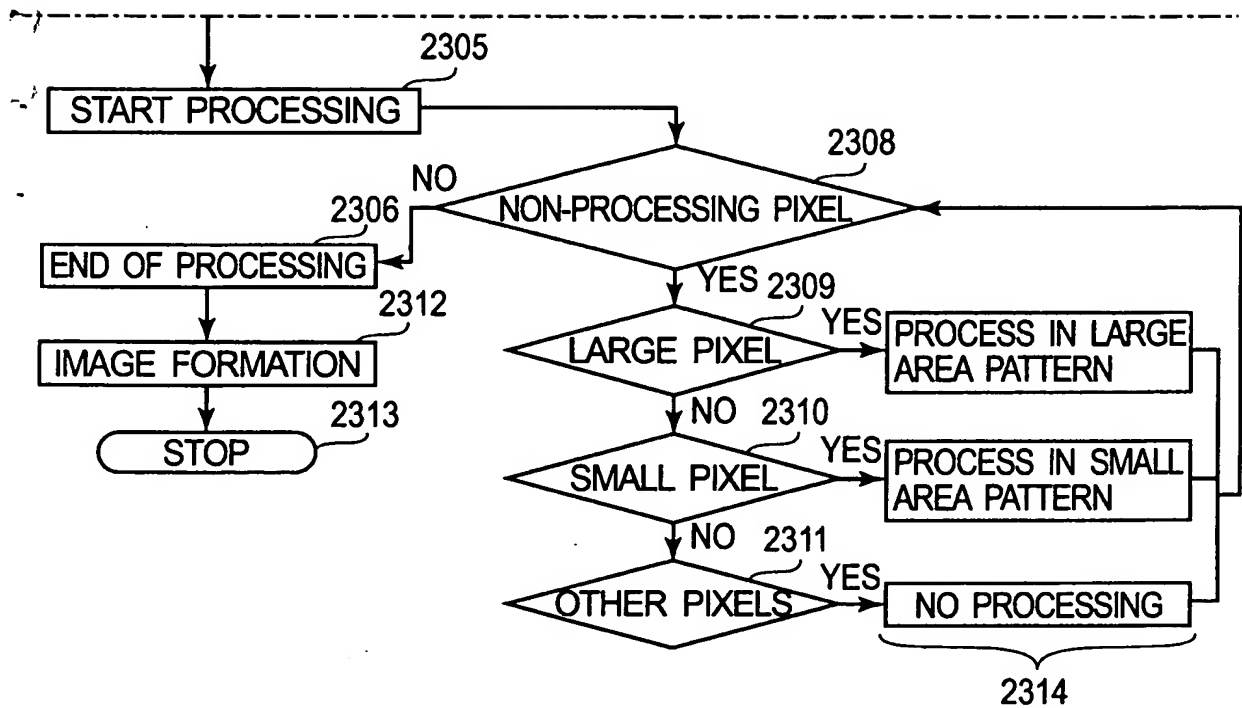


FIG. 32B

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.